

THROUGH-TYPE TERMINAL THERMOPL. SCREW  
 TERMINAL ON BOTH ENDS SINGLE TERM., GREEN-  
 YELLOW, 6.5MM,4

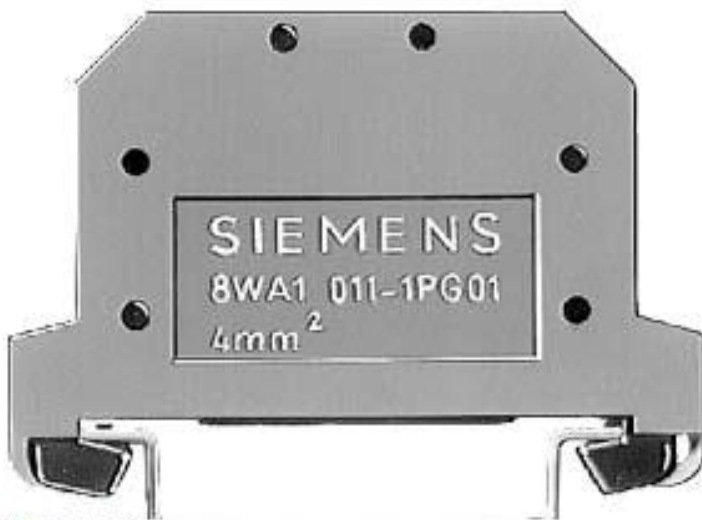


Figure similar

| Model  |    |              |
|--|----|--------------|
| Design of terminal / Terminal levels internally linked |    | No           |
| General technical data                                 |    |              |
| Terminal contact spacing                               | mm | 6.5          |
| Protection class                                       |    |              |
| Combustibility class acc. to UL 94                     |    | V2           |
| Main circuit   |    |              |
| Operating voltage / rated value                        | V  | 800          |
| Operating current / rated value                        | A  | 32           |
| Appearance   |    |              |
| Color  |    | green-yellow |
| Product details  |    |              |
| Product component / required / connection plate        |    | No           |
| Number   |    |              |
| Number of terminal levels                              |    | 1            |
| Number of terminal points / per terminal level         |    | 2            |

| Connections   |                 |                     |
|---|-----------------|---------------------|
| <b>Connectable conductor cross-section / stranded</b> |                 |                     |
| • minimum   | mm <sup>2</sup> | 4                   |
| • maximum   | mm <sup>2</sup> | 4                   |
| <b>Connectable conductor cross-section</b>            |                 |                     |
| • solid   |                 |                     |
| — minimum   | mm <sup>2</sup> | 4                   |
| — maximum   | mm <sup>2</sup> | 4                   |
| • finely stranded                                     |                 |                     |
| — with core end processing / minimum                  | mm <sup>2</sup> | 4                   |
| — with core end processing / maximum                  | mm <sup>2</sup> | 4                   |
| — without core end processing / minimum               | mm <sup>2</sup> | 4                   |
| — without core end processing / maximum               | mm <sup>2</sup> | 4                   |
| <b>Type of electrical connection</b>                  |                 |                     |
| • 1   |                 | screw-type terminal |
| • 2   |                 | screw-type terminal |
| Position / of the terminal                            |                 | lateral             |

| Mechanical Design                         |    |                |
|---|----|----------------|
| Height / with lowest-profile installation | mm | 26             |
| <b>Length</b>                             | mm | 51             |
| <b>Mounting type</b>                      |    | DIN rail 35 mm |
| <b>Net weight</b>                         | g  | 10             |
| Material / of the insulating body         |    | Thermoplast    |

| Environmental conditions     |    |     |
|------------------------------|----|-----|
| <b>Ambient temperature</b>   |    |     |
| • during operation / minimum | °C | -25 |
| • during operation / maximum | °C | 55  |

| Certificates  |  |    |
|---|--|----|
| <b>Design tested acc. to type of protection / EEx e</b> |  | No |

|                          |                   |                   |
|--------------------------|-------------------|-------------------|
| General Product Approval | Test Certificates | Shipping Approval |
|--------------------------|-------------------|-------------------|



EAC

[sonstig](#)



|                   |       |
|-------------------|-------|
| Shipping Approval | other |
|-------------------|-------|

[Umweltbestätigung](#)



GL

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011PG11>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/8WA1011PG11/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=8WA1011PG11](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=8WA1011PG11)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

02.02.2016