



TWIST LEVER FOR POSITION SWITCH 3SE51 METAL LEVER,  
FORM A 27MM LONG,STEP 9MM,  
W. PLASTIC ROLLER 19MM

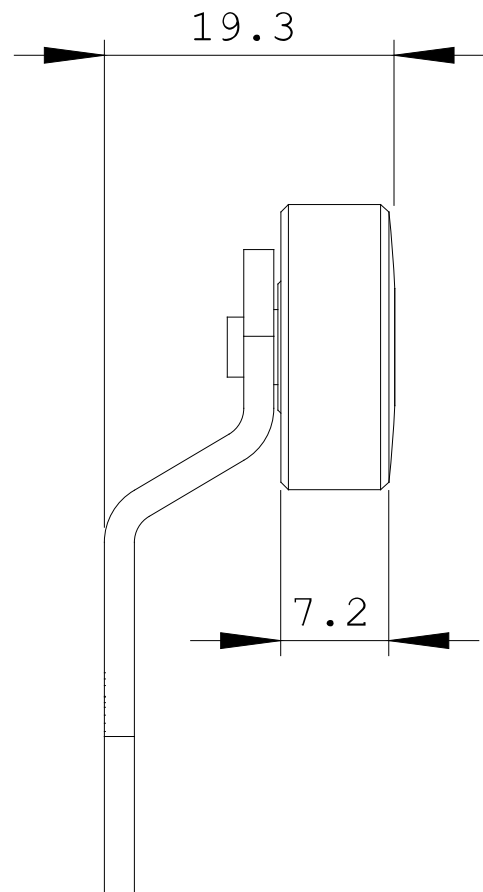
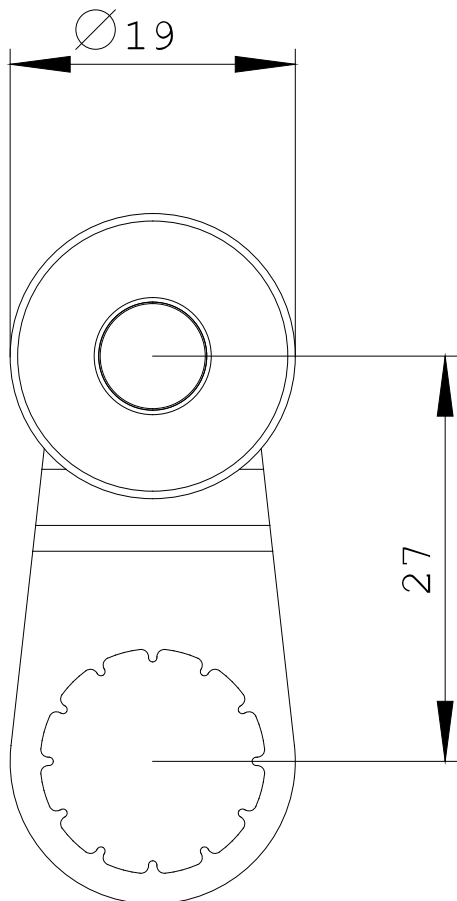
### General technical details:

<b>product designation</b>		actuator for part-turn actuator
<b>Explosion protection category for dust</b>		none
<b>Mechanical operating cycles as operating time</b> • typical		15,000,000
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b> • during operating • during storage	°C °C	-25 ... +85 -40 ... +90
<b>Design of the operating mechanism</b>		metal lever, 27 mm long, step 9 mm, plastic roller 19 mm
<b>mounting position</b>		any
<b>Item designation</b> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		E T

### Certificates/approvals:

**General Product Approval****Test Certificates**[Special Test Certificate](#)

other

[Confirmation](#)[Vibration Test Certificates](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3SE5000-0AA01/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5000-0AA01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AA01)

last change:

Jul 1, 2013