

ACTUATOR HEAD FOR POSITION SWITCH 3SE51/52  
PLAIN STAINLESS STEEL PLUNGER ACC. TO EN50041



### General technical details:

<b>product designation</b>		actuator head for position switch
<b>Explosion protection category for dust</b>		none
<b>Mechanical operating cycles as operating time</b> • typical		15,000,000
<b>Resistance against vibration</b>		0.35 mm / 5g
<b>Resistance against shock</b>		30g / 11 ms
<b>Ambient temperature</b> • during operating • during storage	°C °C	-25 ... +85 -40 ... +90
<b>Material / of the enclosure</b> • of the switch head		metal
<b>Design of the operating mechanism</b>		stainless steel plunger
<b>Minimum actuating force / in activation direction</b>	N	20
<b>mounting position</b>		any
<b>Item designation</b> • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		E T

### Certificates/approvals:

## General Product Approval



## Test Certificates

[Special Test Certificate](#)

other

[Confirmation](#)

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### CAX-Online-Generator


<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5000-0AB01/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SE5000-0AB01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5000-0AB01)

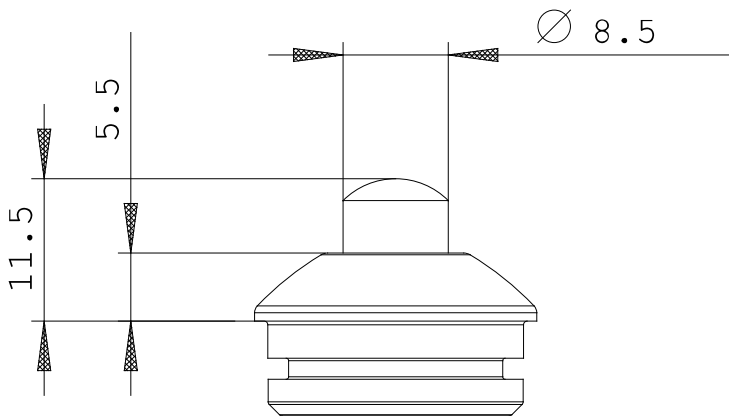

last change:

Jul 1, 2013