



ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION
2 COMMAND POSITIONS GRAY TOP PART

Enclosure:

Design of the enclosure		Empty enclosure for command and signaling devices
Material / of the enclosure		plastic
Color / of top part of the enclosure		grey
Number of Command Points		2
Product component / protective collar		No
Form / of the enclosure front		rectangular
Design of electrical connection / on enclosure		Cable routing above, below / left, right, each 1 x M20
Type of mounting / of enclosure		Vertical / horizontal
Product function / EMERGENCY STOP function		No

Actuato/ signaling device:

Product component / front ring		No
--------------------------------	--	----

Contact block/ lampholder:

Product function / positive opening		No
Type of fixing/fixation / for contact blocks		Floor mounting / front mounting (1-pole)
Product component / fluorescent materials		No
Product extension / optional / fluorescent materials		Yes









Accessories:

Number of labeling plates		2
Product component / holder for 3 switching elements		No

General technical details:

Delivery state / pre-wired on strip terminal		No
Product component / stand/pedestal		No
Resistance against shock <ul style="list-style-type: none"> for devices with incandescent lamp / according to IEC 60068-2-27 for devices without incandescent lamp / according to IEC 60068-2-27 		<div><= 30g</div> <div><= 50g</div>
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Item designation <ul style="list-style-type: none"> according to DIN EN 61346-2 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		<div>U</div> <div>S</div>
Ambient temperature <ul style="list-style-type: none"> during operating during storage 	<div>°C</div> <div>°C</div>	<div>-25 ... +70</div> <div>-40 ... +80</div>
Protection class IP		IP65
climatic class / during the operating phase / according to EN 60721		3K6
Shape / of the installation hole		round
Mounting diameter	mm	22
Width	mm	85
Height	mm	114
Depth	mm	64

Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
 CSA	 GOST	 UL	 EG-Konf.	Special Test Certificate	
Shipping Approval				other	
 ABS	 DNV	 LRS	 PRS	Confirmation	Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrial-controls/mall>

Cax online generator
<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/3SB3802-0AA3/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3802-0AA3

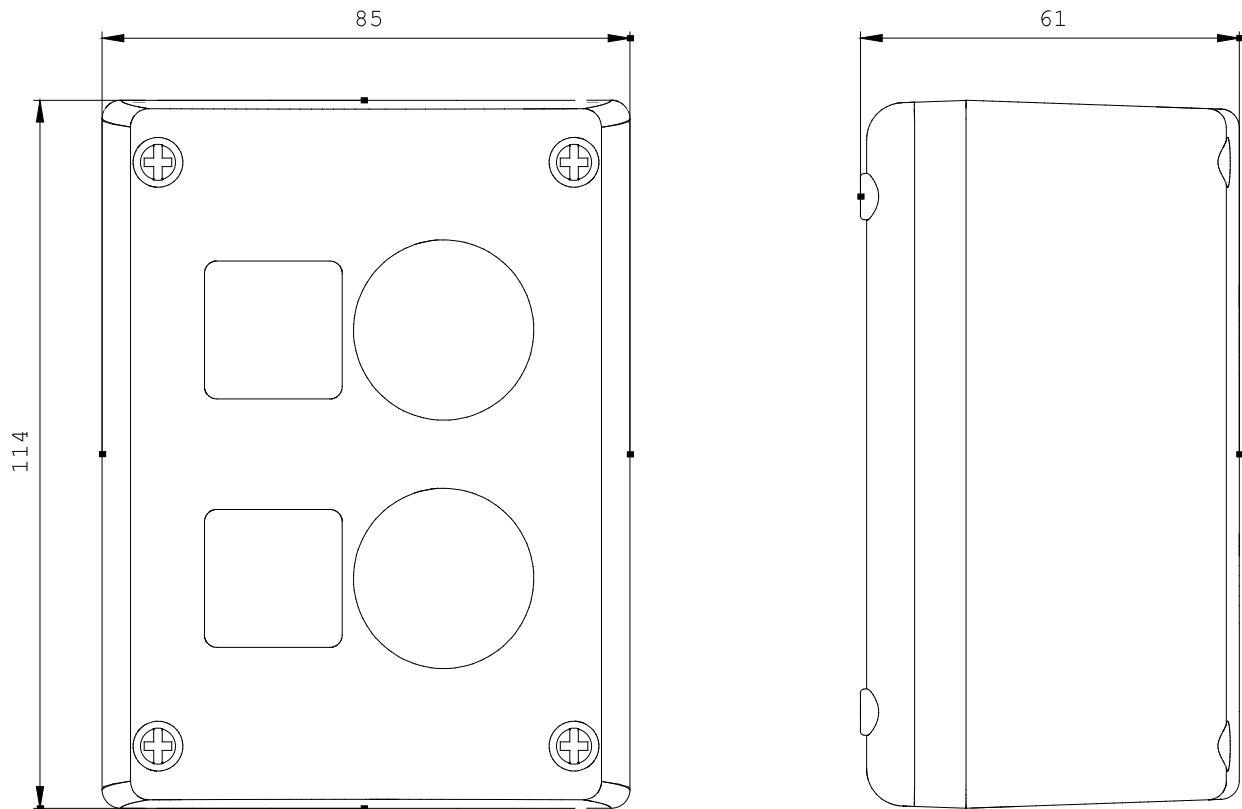

\\w9.4444;

3S

last change:

Sep 2, 2013