



ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION  
3 COMMAND POSITIONS GRAY TOP PART

### Enclosure:

Design of the enclosure		Empty enclosure for command and signaling devices
Material / of the enclosure		plastic
Color / of top part of the enclosure		grey
Number of Command Points		3
Product component / protective collar		No
Form / of the enclosure front		rectangular
Design of electrical connection / on enclosure		Cable routing above, below / left, right, each 1 x M20
Type of mounting / of enclosure		Vertical / horizontal
Product function / EMERGENCY STOP function		No

### Actuato/ signaling device:

Product component / front ring		No
--------------------------------	--	----

### Contact block/ lampholder:

Product function / positive opening		No
Type of fixing/fixation / for contact blocks		Floor mounting / front mounting (1-pole)
Product component / fluorescent materials		No
Product extension / optional / fluorescent materials		Yes









### Accessories:

Number of labeling plates		3
Product component / holder for 3 switching elements		No

#### General technical details:

Delivery state / pre-wired on strip terminal		No
Product component / stand/pedestal		No
Resistance against shock <ul style="list-style-type: none"> <li>for devices with incandescent lamp / according to IEC 60068-2-27</li> <li>for devices without incandescent lamp / according to IEC 60068-2-27</li> </ul>		<= 30g <= 50g
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Item designation <ul style="list-style-type: none"> <li>according to DIN EN 61346-2</li> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		U S
Ambient temperature <ul style="list-style-type: none"> <li>during operating</li> <li>during storage</li> </ul>	°C °C	-25 ... +70 -40 ... +80
Protection class IP		IP65
climatic class / during the operating phase / according to EN 60721		3K6
Shape / of the installation hole		round
Mounting diameter	mm	22
Width	mm	85
Height	mm	154
Depth	mm	64

#### Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
 CSA	 GOST	 UL	 EG-Konf.	<a href="#">Special Test Certificate</a>	
Shipping Approval				other	
 ABS	 DNV	 LRS	 PRS	<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

---

**Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrial-controls/mall>

---

**Cax online generator**  
<http://www.siemens.com/cax>


---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<http://support.automation.siemens.com/WW/view/en/3SB3803-0AA3/all>

---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3SB3803-0AA3](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3803-0AA3)

---

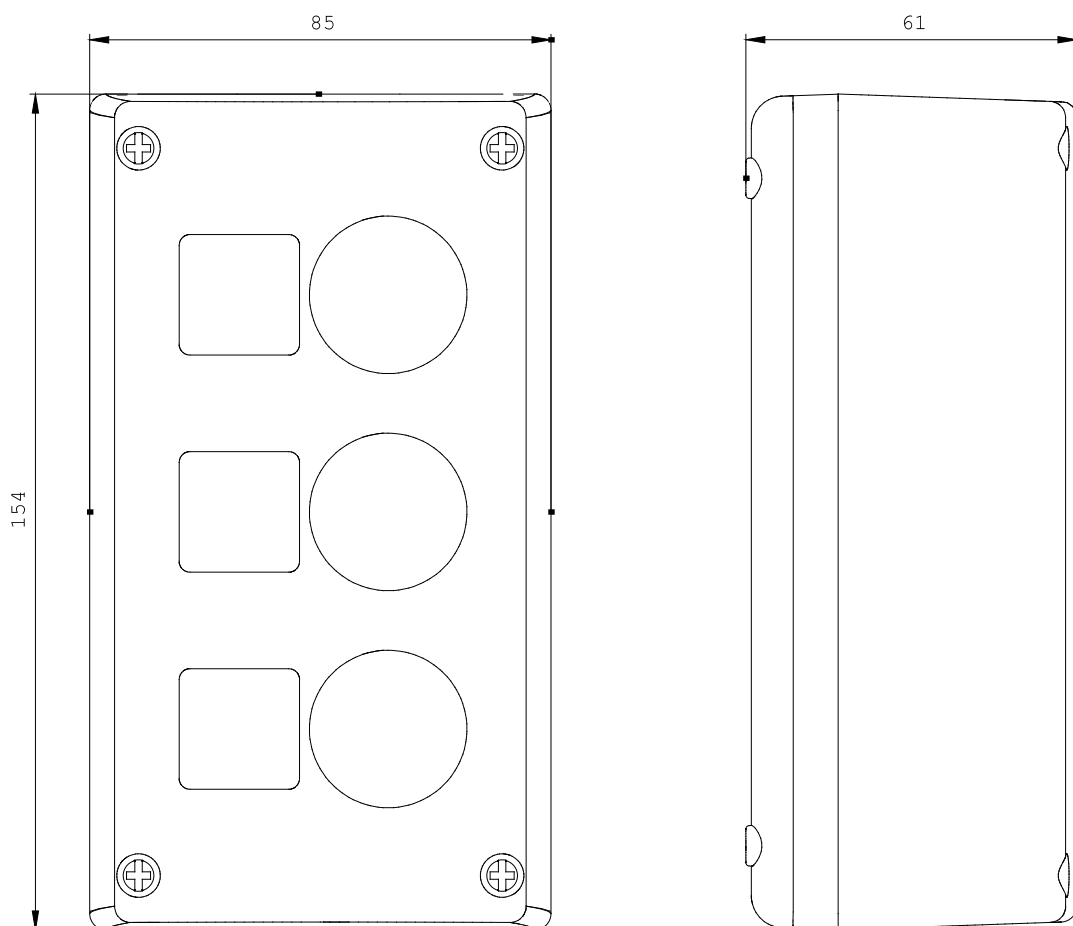

\W9.  
\W9.

**last change:**

Sep 2, 2013