



ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION  
4 COMMAND POSITIONS GRAY TOP PART

Enclosure:		
Design of the enclosure		Empty enclosure for command and signaling devices
Material / of the enclosure		plastic
Color / of top part of the enclosure		grey
Number of Command Points		4
Product component / protective collar		No
Form / of the enclosure front		rectangular
Design of electrical connection / on enclosure		Cable routing above, below / left, right, each 1 x M25
Type of mounting / of enclosure		Vertical / horizontal
Product function / EMERGENCY STOP function		No

Actuato/ signaling device:		
Product component / front ring		No

Contact block/ lampholder:		
Product function / positive opening		No
Type of fixing/fixation / for contact blocks		Floor mounting / front mounting (1-pole)
Product component / fluorescent materials		No
Product extension / optional / fluorescent materials		Yes






Accessories:		
--------------	--	--

Number of labeling plates		4
Product component / holder for 3 switching elements		No

#### General technical details:

Delivery state / pre-wired on strip terminal		No
Product component / stand/pedestal		No
Resistance against shock <ul style="list-style-type: none"> <li>for devices with incandescent lamp / according to IEC 60068-2-27</li> <li>for devices without incandescent lamp / according to IEC 60068-2-27</li> </ul>		<div>&lt;= 30g</div> <div>&lt;= 50g</div>
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Item designation <ul style="list-style-type: none"> <li>according to DIN EN 61346-2</li> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		<div>U</div> <div>S</div>
Ambient temperature <ul style="list-style-type: none"> <li>during operating</li> <li>during storage</li> </ul>	<div>°C</div> <div>°C</div>	<div>-25 ... +70</div> <div>-40 ... +80</div>
Protection class IP		IP65
climatic class / during the operating phase / according to EN 60721		3K6
Shape / of the installation hole		round
Mounting diameter	mm	22
Width	mm	85
Height	mm	194
Depth	mm	64

#### Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA  GOST  UL  EG-Konf.		<a href="#">Special Test Certificate</a>	 DNV
other <a href="#">Confirmation</a> <a href="#">Environmental Confirmations</a>			


#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

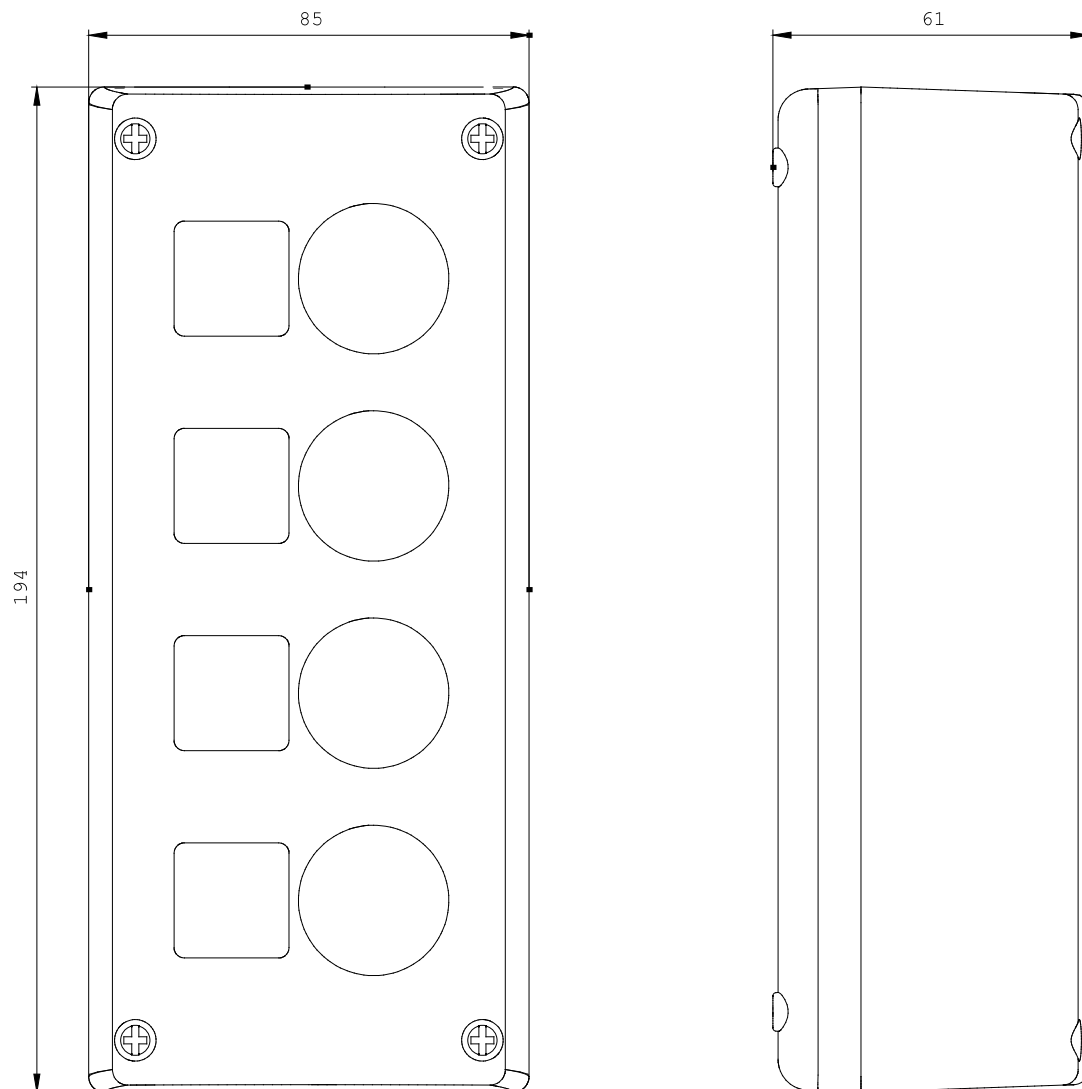

\W9.  
\W9.

last change:

Sep 2, 2013