

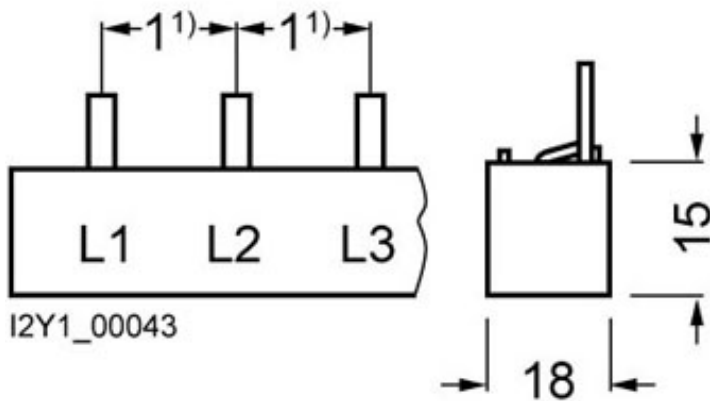
Pin busbar touch-safe, 16 mm<sup>2</sup> 3-phase, 214 mm long can be cut, with end caps



Model	
Product brand name	SETRON
General technical data	
Phase number	3
Cross-section	16 mm <sup>2</sup>
Current	
Continuous current / rated value	80 A
Product details	
Product feature / insulated	Yes
Connections	
Type of electrical connection	Pin
Mechanical Design	
Width	18 mm
Length	214 mm
Net weight	119.46 g
Certificates	



EG-Konf.

[Miscellaneous](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3708>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/5ST3708>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3708](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3708)**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

