


Pin busbar touch-safe, 16 mm<sup>2</sup> 3-phase, 1016 mm long can be cut, without end caps



Model	
Product brand name	SETRON
General technical data	
Phase number	3
Cross-section	16 mm <sup>2</sup>
Current	
Continuous current / rated value	80 A
Product details	
Product feature / insulated	Yes
Connections	
Type of electrical connection	Pin
Mechanical Design	
Width	15.8 mm
Length	1 016 mm
Net weight	619.79 g
Certificates	

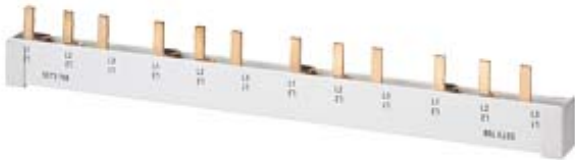

Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3710>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3710>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3710](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3710)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

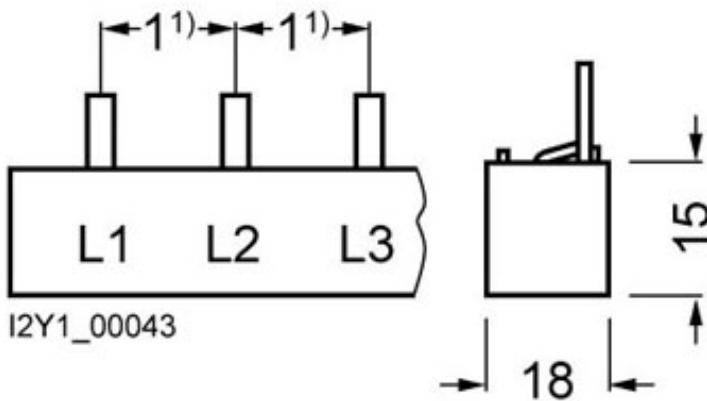

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

