SIEMENS

Product data sheet

3TH4253-0AP0



CONTACTOR RELAY 53E EN 50 011 5NO+3NC, SCREW TERMINALS AC OPERATION AC 230/220V 50HZ, 276/264V 60HZ

General details:						
Size of the contactor		0				
Ambient temperature	-					
during operating	°C	-25 +55				
Protection class IP / on the front		IP20				
Item designation						
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		К				
according to DIN EN 61346-2		К				
according to DIN EN 81346-2		К				
Control circuit:						
Type of voltage / of the controlled supply voltage		AC				
Control supply voltage frequency						
• 1	Hz	50				
• 2	Hz	60				
Control supply voltage						
• at 50 Hz / at AC / rated value	V	230				
• at 60 Hz / at AC / rated value	V	277				
Auxiliary circuit:						

Operating current / a	t AC-15				
• at 230 V / rated value		А	10		
• at 400 V / rated value		А	6		
Identification number and letter for switching elements			53 E		
Number of NC contacts / for auxiliary contacts			3		
lagging switching			0		
delayed switching			0		
asynchronous switching				0	
Number of NO contacts / for auxiliary contacts			5		
leading switching				0	
delayed switching			0		
asynchronous switching				0	
Number of changeover contacts / for auxiliary contacts				0	
Connection type:					
Design of the electrical connection / for auxiliary and control current circuit				screw-	type terminals
Mechanical design	:				
Type of mounting			screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022		
Width			mm	45	
Height		mm	78		
Depth			mm	102	
Certificates/approv	/als:				
General Product Ap	proval				Functional Safety / Safety of Machinery
	(SA)	EHC			Type Examination
Test Certificates					
other	Special Test Certificate	Type Test Certificates/Test Report			
Shipping Approval					
ŮŠ DNV DNV	GL	Llovd's Register LRS	RMRS		
other					
Declaration of Conformity	other	Environmental Confirmations			

Protection against electrical shock		finger-safe
B10 value / with high demand rate		
according to SN 31920		1,000,000
• note		With 0.3 x le
T1 value / for proof test interval or service life / according to IEC 61508	а	20

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall


Cax online generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3TH4253-0AP0/all

Image database (product images 2D dimension drawings 2D models, davies size

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TH4253-0AP0



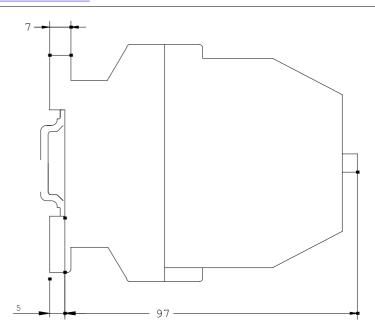

last change:

Feb 25, 2013