SIEMENS

Product data sheet 3TG1001-0AG2



CONTACTOR SCREW TERMINALS, 3NO+1NC FOR SNAPPING ONTO STANDARD MOUNTING RAIL AC OPERATION AC 110V,45...450HZ

General technical details:			
Operating current			
• at AC-3 / at 400 V / rated value	Α	8.4	
• at AC-1 / at 400 V / rated value	Α	20	
type of voltage		AC	
Supply voltage frequency / for auxiliary and control current circuit / rated value			
• minimum	Hz	45	
• maximum	Hz	450	
Control supply voltage			
• at 50 Hz / at AC / rated value			
• minimum	V	110	
• maximum	V	110	
• at 60 Hz / at AC / rated value			
• minimum	V	110	
• maximum	V	110	
Service power / at AC-3 / at 400 V / rated value	kW	4	
Number of poles		4	
Number of NC contacts / for main contacts		1	
Number of NC contacts / for auxiliary contacts		0	
Number of NO contacts / for main contacts		3	

Number of NO contacts / for auxiliary contacts		0
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К
Item designation / according to DIN EN 61346-2		К
Protection class IP		IP00
Ambient temperature		
during operating	°C	5525

Mechanical design:				
Design of the electrical connection				
for main current circuit		screw-type terminals		
• for auxiliary and control current circuit		screw-type terminals		
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail		
• series installation		Yes		
Width	mm	36		
Height	mm	62		
Depth	mm	60		

Certificates/approvals:

General Product Approval

Declaration of Conformity

Test Certificates











Special Test Certificate

other

Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3TG1001-0AG2/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TG1001-0AG2}$

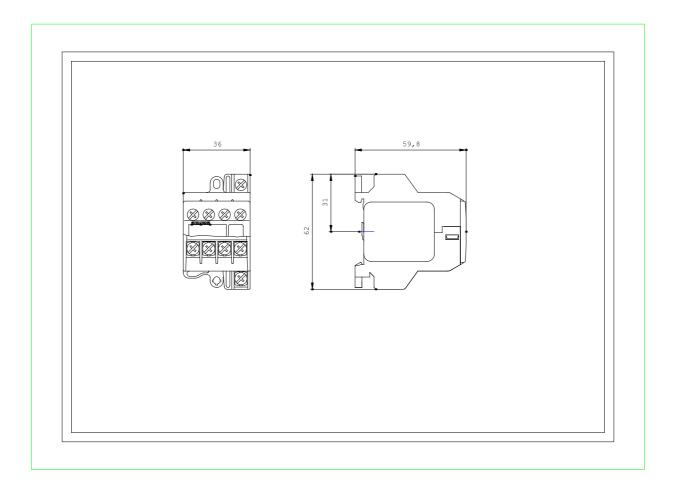

last change: Jan 28, 2013