# **SIEMENS**

Product data sheet 3RV2011-1FA10



CIRCUIT-BREAKER SZ S00, FOR MOTOR PROTECTION, CLASS 10, A-RELEASE 3.5...5A, N-RELEASE 65A, SCREW CONNECTION, STANDARD SW. CAPACITY

General technical data:		
product brand name		SIRIUS
product designation		3RV2 circuit breaker
Size of the circuit-breaker		S00
Number of poles / for main current circuit		3
Product function		
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>		No
overload protection		Yes
phase disturbance recognition		Yes
short-circuit to earth recognition		No
Product component		
auxiliary switch		No
undervoltage release mechanism		No
trip indicator		No
Product extension		
auxiliary switch		Yes
optional / motor drive		No
Impulse voltage resistance / rated value	kV	6
Protection class IP / on the front		IP20
Protection against electrical shock		finger-safe

Installation altitude / at a height over sea level / maximum	m	2,000
Resistance against shock		25g / 11 ms
Ambient temperature		
during transport	°C	-50 +80
during storage	°C	-50 +80
during operating	°C	-20 +60
Active power loss / total / typical	W	7
Main circuit:		
Operating voltage / rated value	V	690
Service power / at AC-3		
• at 400 V / rated value	W	2,200
• at 500 V / rated value	W	2,200
• at 690 V / rated value	W	4,000
Operational current / at AC-3 / at 400 V / rated value	Α	5
Mechanical operating cycles as operating time / of the main contacts / typical		100,000
Frequency of operation / at AC-3 / according to IEC 60947-6-2	1/h	15
Auxiliary circuit:		
Auxiliary circuit:  Number of changeover contacts / for auxiliary contacts		0
		0 100,000
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary		
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical		
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:	A	100,000
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent	A	100,000 CLASS 10
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release	A	100,000 CLASS 10
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)		100,000 CLASS 10 3.5 5
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value	A	100,000 CLASS 10 3.5 5
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value  • at 500 V / rated value	A A	100,000 CLASS 10 3.5 5
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value  • at 500 V / rated value  • at 690 V / rated value	A A	100,000 CLASS 10 3.5 5
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value  • at 500 V / rated value  • at 690 V / rated value  Safety:	A A	100,000 CLASS 10 3.5 5
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value • at 500 V / rated value  • at 690 V / rated value  Safety:  Proportion of dangerous failures	A A A	100,000  CLASS 10  3.5 5  100,000  100,000  6,000
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value  • at 500 V / rated value  • at 690 V / rated value  Safety:  Proportion of dangerous failures  • with high demand rate / according to SN 31920	A A A	100,000  CLASS 10  3.5 5  100,000  100,000  6,000
Number of changeover contacts / for auxiliary contacts  Mechanical operating cycles as operating time / of the auxiliary contacts / typical  Protection function:  Trip class  Adjustable response current / of the current-dependent overload release  Breaking capacity limit short-circuit current (Icu)  • at 400 V / rated value  • at 500 V / rated value  • at 690 V / rated value  safety:  Proportion of dangerous failures  • with high demand rate / according to SN 31920  • with low demand rate / according to SN 31920  Failure rate (FIT value) / with low demand rate / according to SN	A A A %	100,000  CLASS 10  3.5 5  100,000  100,000  6,000

Installation/mounting/dimensions:			
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715	
mounting position		any	
Depth	mm	96	
Height	mm	97	
Width	mm	45	

Connections:	
Arrangement of electrical connectors / for main current circuit	Top and bottom
Design of the electrical connection	
for main current circuit	screw-type terminals
Type of the connectable conductor cross-section	
for main contacts	
• solid	2x (0.75 2.5 mm²), 2x 4 mm²
• finely stranded	
<ul> <li>with conductor end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
• for AWG conductors / for main contacts	2x (18 14), 2x 12

UL/CSA ratings:				
yielded mechanical performance (hp)				
• for single-phase squirrel cage motors				
• at 110/120 V / rated value	hp	0.167		
• at 230 V / rated value	hp	0.5		
for three-phase squirrel cage motors				
• at 200/208 V / rated value	hp	1		
• at 220/230 V / rated value	hp	1		
• at 460/480 V / rated value	hp	3		
• at 575/600 V / rated value	hp	3		
Operating current (FLA) / for three-phase squirrel cage motors				
• at 480 V / rated value	Α	4.8		
• at 600 V / rated value	Α	3.9		

# Certificates/approvals:

## **General Product Approval**

# Declaration of Conformity

#### **Test Certificates**







Special Test Certificate Type Test
Certificates/Test
Report

## **Shipping Approval**













# **Shipping Approval**

otne





other

# **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

## Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

#### Cax online generator:


http://www.siemens.com/cax


#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RV2011-1FA10/all

# $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV2011-1FA10

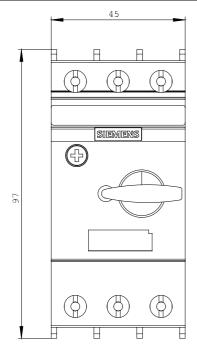

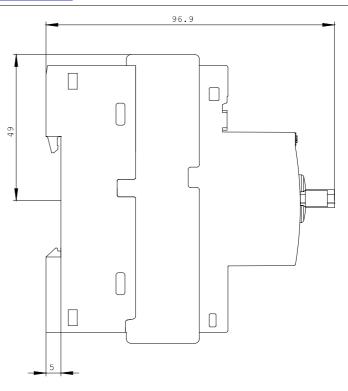

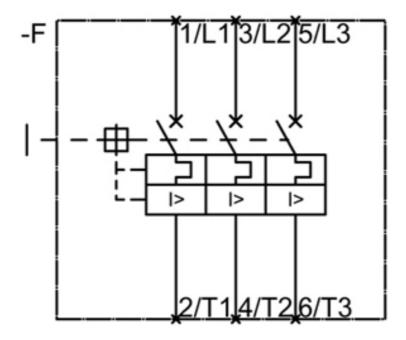

last change: Jul 1, 2013