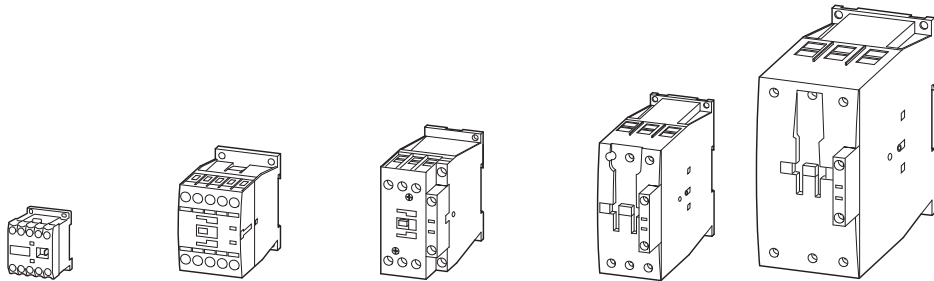
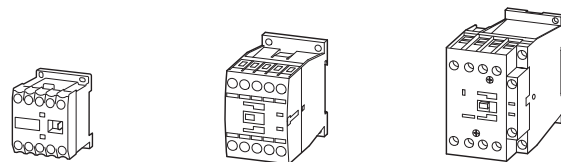


DILM, DILE(E)M, DILMP

Prezentarea generală a gamei după puteri







Contactoare
tripolare

DIL		EEM	EM	EM12	M7	M9	M12	M15	M17	M25	M32	M38	M40	M50	M65	M80	M95	M115	M150	M170	
Aparate de bază	pag	→ 5/4			→ 5/18				→ 5/18				→ 5/20				→ 5/50				
Aparate complete	pag	–			→ 5/24			–	→ 5/24				→ 5/26				→ 5/26				
Tensiunea nominală de lucru		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	
AC-3																					
Puterea nominală a motoarelor de c.a. trifazate 50 – 60 Hz																					
220 V – 230 V		1.5	2.2	3	2.2	2.5	3.5	4	5	7.5	10	11	12.5	15.5	20	25	30	37	48	52	
380 V – 400 V		3	4	5.5	3	4	5.5	7.5	7.5	11	15	18.5	18.5	22	30	37	45	55	75	90	
440 V		3.3	4,6	5.5	4.5	5.5	7.5	8.4	10.5	15.5	20	21	25	32	41	51	60	75	95	105	
500 V		3	4	5.5	3.5	4.5	7	7.5	12	17.5	23	24	28	36	47	58	70	85	110	120	
660 V/690 V		3	4	4	3.5	4.5	6.5	7	11	14	17	21	23	30	35	63	75	90	96	140	
1000 V		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
AC-4																					
⚠ Durată de viață crescută pentru DILM7 – DILM150 la 200.000 manevre																					
Puterea nominală a motoarelor de c.a. trifazate 50 – 60 Hz																					
220 V – 230 V		1.1	1,5	1.5	1	1.5	2	2	2.5	3.5	4	4	5	6	7	12	16	17	20	20	
380 V – 400 V		2.2	3	3	2.2	2.5	3	3	4.5	6	7	7	9	10	12	20	26	28	33	33	
440 V		2.4	3,3	3.3	2.4	3	3.6	3.6	5.5	7	8	8	10	12	14	25	32	35	41	41	
500 V		2.2	3	3	2.5	2.8	3.5	3.5	6	8	9	9	11	13	16	29	36	40	47	47	
660 V/690 V		2.2	3	3	2.9	3.6	4.4	4.4	6.5	8.5	10	10	12	14	17	26	35	43	48	48	
1000 V		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
AC-1																					
Puterea nominala la sarcina rezistivă, 40 °C																					
220 V – 230 V		8	8	8	8	8	8	8	15	17	17	17	22	30	37	42	49	61	72	85	
380 V – 400 V		13	13	13	14	14	14	14	26	29	29	29	39	53	65	72	85	105	125	150	
440 V		15	15	15	16	16	16	16	30	34	34	34	45	58	71	80	94	116	138	170	
500 V		18	18	18	19	19	19	19	34	38	38	38	51	66	81	90	107	132	156	194	
660 V/690 V		23	23	23	25	25	25	25	45	51	51	51	68	91	111	125	148	182	216	268	
1000 V		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Curent termic convențional																					
$I_{th} = I_e$ în mediu deschis la 40 °C	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
		22	22	22	22	22	22	22	40	45	45	45	60	80	98	110	130	160	190	225	

Contactoare
tetrapolare

Tensiunea nominală de lucru	DIL pagina	EM4 → 5/4	MP20 → 5/36	MP32 → 5/36
AC-1				
Curent termic convențional $I_{th} = I_e$ în mediu deschis la 40 °C				
până la 690 V		22	22	32




Contattoare
tripolare

															
M185A	M225A	M250	M300A	M400	M500	M580	M650	M750	M820	M1000	M1600	H1400	H2000	H2200	H2600
→ 5/32			→ 5/32			→ 5/32		→ 5/32			→ 5/34				

kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
55	70	75	90	125	155	185	205	240	260	315	500	—	—	—	—
90	110	132	160	200	250	315	355	400	450	560	900	—	—	—	—
115	142	157	190	255	345	370	420	480	525	650	1000	—	—	—	—
132	160	180	215	290	360	420	470	550	600	730	1180	—	—	—	—
175	215	240	286	344	344	560	630	720	750	1000	1600	—	—	—	—
108	108	108	132	132	132	600	600	800	800	1000	1770	—	—	—	—
41	51	62	75	92	112	143	161	181	209	260	430	—	—	—	—
75	90	110	132	160	200	250	280	315	355	450	750	—	—	—	—
85	102	125	140	186	229	290	326	367	418	520	830	—	—	—	—
96	116	143	172	214	260	330	370	417	474	590	940	—	—	—	—
127	155	189	229	283	344	440	494	556	633	780	1300	—	—	—	—
108	108	108	132	132	132	509	509	678	678	1000	1650	—	—	—	—
121	139	155	177	221	310	354	376	398	443	443	717	620	886	1075	1269
210	241	268	306	382	535	612	650	689	766	766	1247	1071	1531	1870	2207
243	279	310	354	443	620	709	753	797	886	886	1371	1240	1773	2058	2427
277	317	352	403	503	705	806	856	906	1007	1007	1558	1410	2015	2338	2758
365	419	465	532	664	930	1064	1130	1196	1330	1330	2151	1861	2660	3227	3806
554	635	705	806	1007	1410	1612	1712	1813	2015	2015	2420	2417	3223	4676	5516
A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

337	356	400	430	612	857	980	1041	1102	1225	1225	2200	1714	2450	2700	3185
-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------

Contattoare
tetrapolare

					
MP45	MP63	MP80	MP125	MP160	MP200
→ 5/36	→ 5/36		→ 5/36		
A	A	A	A	A	A
45	63	80	125	160	200